
FOR BARE EARTH APPLICATION ONLY

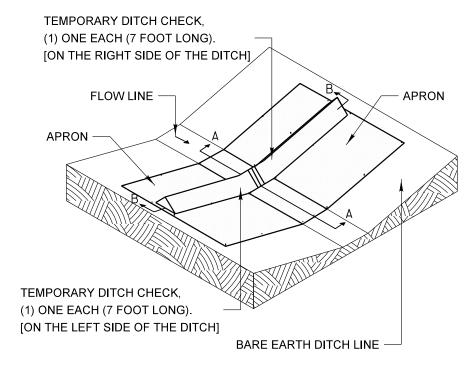

SILT DIKE UNIT ISOMETRIC


NOTES:


THE TEMPORARY DITCH CHECK SHALL BE USED IN BARE EARTH DITCH LINES AND SHALL BE REMOVED JUST PRIOR TO THE INSTALLATION OF EROSION CONTROL BLANKET AND SEEDING.

THE INSTALLATION SHOWN WILL BE MEASURED AND PAID FOR AS A TEMPORARY DITCH CHECK 14 FEET IN LENGTH.

STAPLES SHALL BE PLACED WHERE THE UNITS OVERLAP AND IN THE CENTER OF THE 7' UNIT AS SHOWN ON THE DIAGRAM.

POINT 1 MUST BE HIGHER THAN POINT 2 TO INSURE THAT WATER FLOWS OVER THE DIKE AND NOT AROUND THE ENDS.

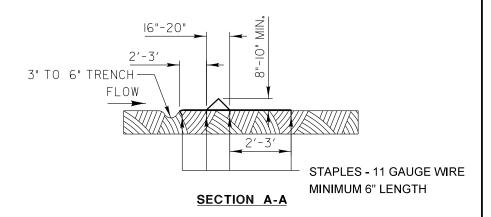

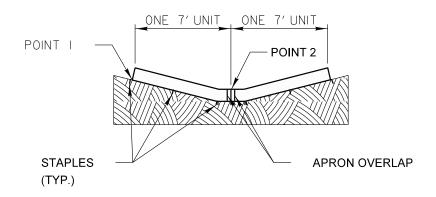

SECTION B-B

بالد	DATE	REVISIONS
	04/11/08	ADDED DIMENSIONS
711	04/15/10	REVISED PAY ITEM
T	10/10/12	ADDED PLASTIC BERM (pg2)
- 11		

LakeCounty
Division of Transportation

APPROVED I


APPROVED BY: M. G. ZEMAITIS

DATE: APRIL 1. 2007

EMPORARY DITCH CHECK
INSTALLATION FOR
ROADWAY OR
DRAINAGE DITCH

(SHEET 1 OF 2)

FOR USE WHILE ESTABLISHING FINAL LANDSCAPING

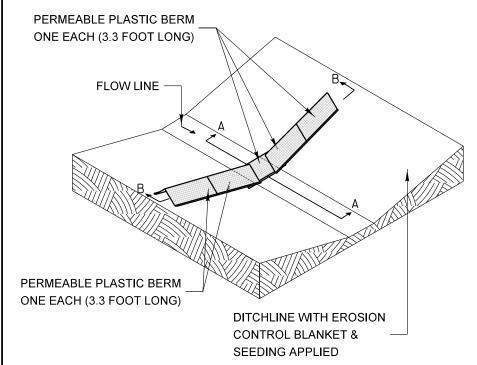

PERMEABLE PLASTIC BERM ISOMETRIC


NOTES:


THE PERMEABLE PLASTIC BERM SHALL REPLACE THE TEMPORARY DITCH CHECK AFTER THE INSTALLATION OF EROSION CONTROL BLANKET AND SEEDING.

EACH PERMEABLE PLASTIC BERM IS 3.3 FEET IN LENGTH. THE MINIMUM INSTALLATION IN A DITCH SHALL BE THREE UNITS. THE INSTALLATION SHOWN WILL BE MEASURED AND PAID FOR AS A PERMEABLE PLASTIC BERM 16.5 FEET IN LENGTH (5 UNITS).

STAPLES SHALL BE PLACED WHERE THE UNITS OVERLAP AND ACCORDING TO THE MANUFACTURER'S INSTALLATION INSTRUCTIONS.

POINT 1 MUST BE HIGHER THAN POINT 2 TO INSURE THAT WATER FLOWS THROUGH OR OVER THE BERM AND NOT AROUND THE ENDS.

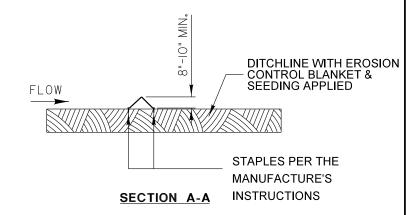

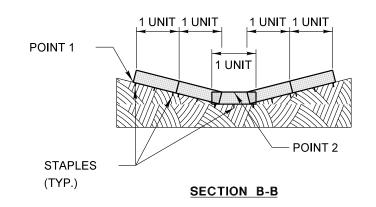

REVISIONS	DATE	
ADDED DIMENSIONS	04/11/08	
REVISED PAY ITEM	04/15/10	1
ADDED PLASTIC BERM (pg2)	10/10/12	
		1
		1
		1
		1
		1
		1
		1

LakeCounty
Division of Transportation

APPROVED BY: M. G. ZEMAITIS
DATE: APRIL I, 2007

TEMPORARY DITCH CHECK INSTALLATION FOR ROADWAY OR DRAINAGE DITCH

(SHEET 2 OF 2)

LC2050