


TYPICAL METHOD

NOTE:

MINIMUM FLAG THICKNESS 9"

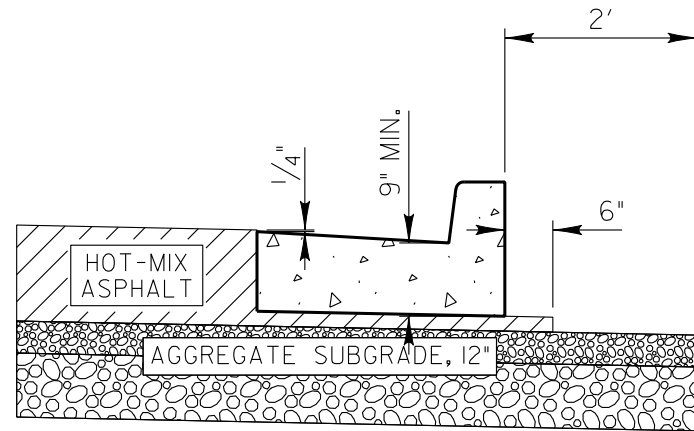


OPTIONAL METHOD

NOTE:

COST OF HOT-MIX ASPHALT MATERIAL UNDER CURB AND 6" OUTSIDE OF CURB TO BE INCIDENTAL TO COST OF COMBINATION CONCRETE CURB AND GUTTER.

SCALE: 1" = 2'

REVISIONS	DATE	 LakeCounty Division of Transportation	APPROVED BY: M. G. ZEMAITIS
			DATE: APRIL 1, 2007
		CURB & GUTTER SUBGRADE OPTIONS	
		LC3000	