


\*CURB TRANSITION EACH END TO BE PAID FOR AT THE CONTRACT UNIT PRICE FOR COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24.

**DESIGN NOTES:**

1. The Resident Engineer shall contact the local postmaster prior to installing the new mailbox posts for the local mounting height of the mailbox. The standard mounting height is 3 1/2'; however, local post-masters may vary this height.
2. The standard mailbox post is a 4"x4" or a 4 1/2" dia. treated wood post. The standard bury length of the post is 2'. Do not shorten or exceed this bury length.
3. Depending on the location of the shoulder break with respect to the edge of the mailbox turnout the overall post length may vary from 5' 8" to 6' 4" to maintain the 2' bury length and the 3 1/2' mounting height.

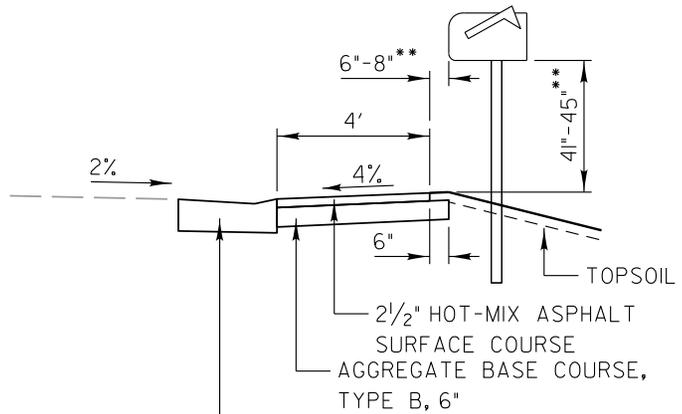

SECTION A-A  
SCALE: 1" = 5'  
TYPE B-6.24 DEPRESSED - 70 LIN FT

\*\* USPS RESIDENTIAL MAILBOX STANDARD

| REVISIONS                          | DATE      |
|------------------------------------|-----------|
| 6"-8" BOX OFFSET ADDED             | 12/22/11  |
| Revised Type A to Type B Aggregate | 12/20/12  |
| Revised Curb Transition            | 1/7/15    |
| Pave Shldr = 3' (all cases)        | 2/24/2017 |
|                                    |           |
|                                    |           |



APPROVED BY: M. G. ZEMAITIS  
DATE: APRIL 1, 2007

**MAILBOX TURNOUT  
ALONG CURBED ROADS**

LC4121