



ENTRANCE WITH AGGREGATE SHOULDER

ENTRANCE WITH CURB & GUTTER

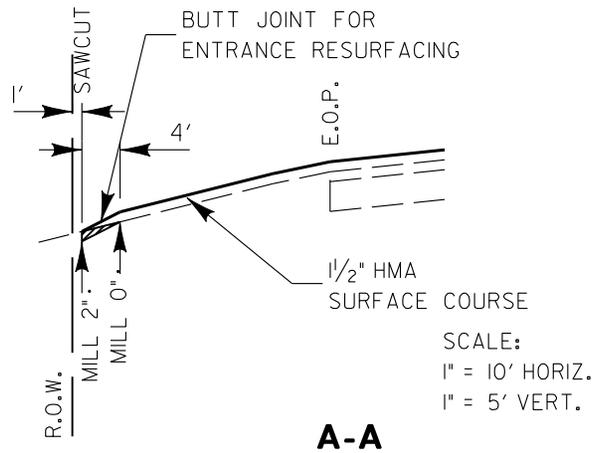

A-A

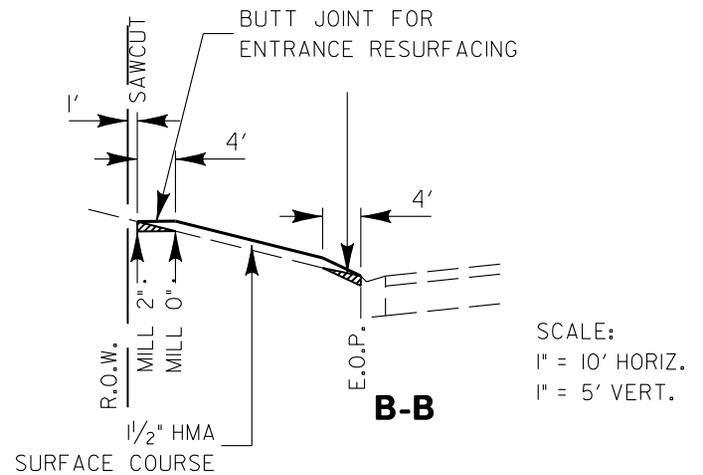

B-B

ESTIMATED QUANTITIES (BASED ON 115 SQ YD PER ENTRANCE)	AGGREGATE SHOULDER	CURB & GUTTER
HMA SURFACE COURSE @ 1/2"	10 TON	10 TON
BUTT JOINT FOR ENTRANCE RESURFACING	30 FT	70 FT
TOPSOIL, FURNISH & PLACE, 4" SEEDING, CLASS 2A, EROSION CONTROL BLANKET	15 SQ YD	15 SQ YD
BITUMINOUS MATERIALS (PRIME COAT)	18 GAL	18 GAL

REVISIONS	DATE


LakeCounty
 Division of Transportation

APPROVED BY: M. G. ZEMAITIS
DATE: APRIL 1, 2007

**TYPICAL MAJOR ACCESS
TREATMENT ON
RESURFACING PROJECTS**

LC4111