





30" X 12" WHITE ON GREEN REFLECTIVE BACKGROUND, 1/8" BORDER, LETTER SIZE 4C

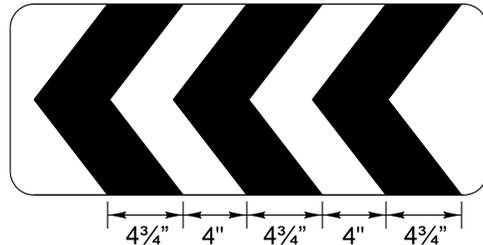

30" X 12" BLACK ON FLOURESCENT ORANGE CHEVRONS

EXAMPLE OF DRIVEWAY SIGN ASSEMBLY INSTALLATION

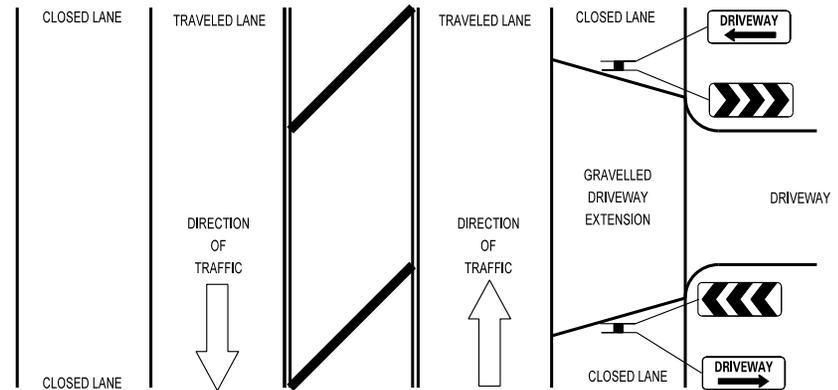

TEMPORARY CONSTRUCTION INFORMATION SIGNING NOTES:

1. The driveway and chevron signs shall be mounted back to back on the near side of the roadway where the entrance is located. There will be two sign assemblies per driveway.
2. Temporary construction information signs shall be post mounted 7' above the near edge of pavement and shall be a minimum of 6' beyond the edge of the nearest traveled lane, or as directed by the Engineer.
3. The retroreflective sign face shall be a minimum of Type "A" material.
4. The temporary construction information signs shall be removed or relocated when the Engineer determines the signs to be no longer necessary.
5. Existing traffic control signs and messages that are in conflict with the proposed maintenance of traffic shall be covered or modified with a temporary overlay as shown in the plans and/or as directed by the Engineer.
6. Install additional temporary sign panel assemblies as shown in the plans and/or directed by the Engineer.

REVISIONS	DATE
Revised Signs & Text	1/1/09
Text Update	7/15/11



APPROVED BY: A KHAWAJA  
DATE: APRIL 1, 2007

**TEMPORARY CONSTRUCTION INFORMATION SIGNS**

SHEET 1 OF 2

LC7201



48" X 36"  
 BLACK ON FLUORESCENT ORANGE  
 REFLECTIVE BACKGROUND  
 1" BORDER WITH 5/8" INSET  
 LETTER SIZE 6D  
 \*LETTER SIZE 6E BOLD

REVISIONS	DATE		APPROVED BY: A KHAWAJA
Revised Signs & Text	1/1/09		Division of Transportation
Text Update	7/15/11		

**TEMPORARY CONSTRUCTION  
 INFORMATION SIGNS**

SHEET 2 OF 2

LC7201